

EARTHY  
RABBL  
TIMES  
TURE  
US




FPO  
Cinammon  
colored swatch  
**NEW**



# CLODAGH

## COLLECTION

Intriguing surface textures from complex highlighting and shadows. Color interest is created through reflection and refraction giving depth and loft to plain colors in an unprecedented way.

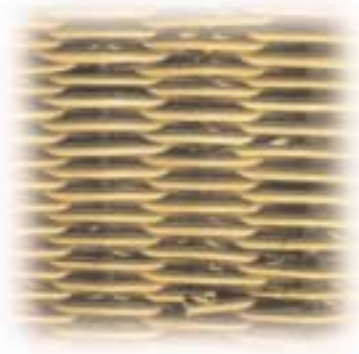

## BUNCRANA

An interpretation of the subtlety and strength of traditional Irish woven willow baskets lends light shadow and depth so a single color carpet becomes multicolor.



## KILDARE

Overlapping curved tiles form a random yet sinuous pattern reminiscent of cobblestone streets.



## GLANMIRE

The weathered patina of old metal down spouts in rain and mist.



## LISADELL

Waning highlights and evening shadows playing over roof slates in a village in the west of Ireland.

BUNCRANA



KILDARE



GLANMIRE

LISADELL



## Buncrana D4116

### SPECIFICATIONS

#### Broadloom

<b>Construction</b>	triax tufting technology
<b>Surface Texture</b>	textured performance loop
<b>Gauge</b>	5/64" (50.4/10 cm)
<b>Stitches</b>	10.4 per inch (40.94/10 cm)
<b>Finished Pile Thickness</b>	.189" avg (4.8 mm)
<b>Face Yarn</b>	Antron® Legacy nylon with DuraTech soil protection by DuPont
<b>Dye System</b>	piece dyed/Elumicolor™ by Lees
<b>Fiber Technology</b>	Duracolor® by Lees stain resistant system
<b>Face Yarn Weight</b>	40 oz/yd <sup>2</sup> (1356.40 gm/m <sup>2</sup> )
<b>Backing Materials</b>	Unibond® by Lees
<b>Primary</b>	woven polypropylene
<b>Bonding Agent</b>	Unibond® hot melt thermoplastic
<b>Secondary</b>	woven polypropylene
<b>Total Weight</b>	90.44 oz/yd <sup>2</sup> (3066.82 gm/m <sup>2</sup> )
<b>Size</b>	12'3" width (3.73 m)
<b>Pattern Repeat</b>	18 3/8" W x 27 11/16" L (46.7 cm x 70.3 cm)



## Kildare D4126

### SPECIFICATIONS

#### Broadloom

<b>Construction</b>	triax tufting technology
<b>Surface Texture</b>	textured performance loop
<b>Gauge</b>	5/64" (50.4/10 cm)
<b>Stitches</b>	9.6 per inch (37.80/10 cm)
<b>Finished Pile Thickness</b>	.200" avg (5.1 mm)
<b>Face Yarn</b>	Antron® Legacy nylon with DuraTech soil protection by DuPont
<b>Dye System</b>	piece dyed/Elumicolor™ by Lees
<b>Fiber Technology</b>	Duracolor® by Lees stain resistant system
<b>Face Yarn Weight</b>	40 oz/yd <sup>2</sup> (1356.40 gm/m <sup>2</sup> )
<b>Backing Materials</b>	Unibond® by Lees
<b>Primary</b>	woven polypropylene
<b>Bonding Agent</b>	Unibond® hot melt thermoplastic
<b>Secondary</b>	woven polypropylene
<b>Total Weight</b>	90.44 oz/yd <sup>2</sup> (3066.82 gm/m <sup>2</sup> )
<b>Size</b>	12'3" width (3.73 m)
<b>Pattern Repeat</b>	9 3/16" W x 26 3/4" L (23.3 cm x 67.9 cm)
<b>Minimum</b>	300 yards



## Glanmire D4106

### SPECIFICATIONS

#### Broadloom

<b>Construction</b>	triax tufting technology
<b>Surface Texture</b>	textured performance loop
<b>Gauge</b>	5/64" (50.4/10 cm)
<b>Stitches</b>	11.0 per inch (43.31/10 cm)
<b>Finished Pile Thickness</b>	.186" avg (4.7 mm)
<b>Face Yarn</b>	Antron® Legacy nylon with DuraTech soil protection by DuPont
<b>Dye System</b>	piece dyed/Elumicolor™ by Lees
<b>Fiber Technology</b>	Duracolor® by Lees stain resistant system
<b>Face Yarn Weight</b>	40 oz/yd <sup>2</sup> (1356.40 gm/m <sup>2</sup> )
<b>Backing Materials</b>	Unibond® by Lees
<b>Primary</b>	woven polypropylene
<b>Bonding Agent</b>	Unibond® hot melt thermoplastic
<b>Secondary</b>	woven polypropylene
<b>Total Weight</b>	90.44 oz/yd <sup>2</sup> (3066.82 gm/m <sup>2</sup> )
<b>Size</b>	12'3" width (3.73 m)
<b>Pattern Repeat</b>	9 3/16" W x 23" L (23.3 cm x 58.4 cm)
<b>Minimum</b>	300 yards



## Lisadell D4146

### SPECIFICATIONS

#### Broadloom

<b>Construction</b>	triax tufting technology
<b>Surface Texture</b>	textured performance loop
<b>Gauge</b>	5/64" (50.4/10 cm)
<b>Stitches</b>	9.8 per inch (38.58/10 cm)
<b>Finished Pile Thickness</b>	.214" avg (5.4 mm)
<b>Face Yarn</b>	Antron® Legacy nylon with DuraTech soil protection by DuPont
<b>Dye System</b>	piece dyed/Elumicolor™ by Lees
<b>Fiber Technology</b>	Duracolor® by Lees stain resistant system
<b>Face Yarn Weight</b>	40 oz/yd <sup>2</sup> (1356.40 gm/m <sup>2</sup> )
<b>Backing Materials</b>	Unibond® by Lees
<b>Primary</b>	woven polypropylene
<b>Bonding Agent</b>	Unibond® hot melt thermoplastic
<b>Secondary</b>	woven polypropylene
<b>Total Weight</b>	90.44 oz/yd <sup>2</sup> (3066.82 gm/m <sup>2</sup> )
<b>Size</b>	12'3" width (3.73 m)
<b>Pattern Repeat</b>	18 3/16" W x 41" L (46.2 cm x 104 cm)
<b>Minimum</b>	300 yards

### PERFORMANCE

<b>Static</b>	3.0 KV when tested under the Standard Shuffle Test 70°F (21°C) - 20% R.H.
<b>Flammability</b>	Passes DOC-FF-1-70 Pill Test
<b>Flooring Radiant Panel Test</b>	Meets NFPA Class 1 when tested under ASTM E-648 glue down
<b>Smoke Density</b>	NBS Smoke Chamber NFPA-258 - Less than 450 Flaming Mode
<b>Construction Materials</b>	100% man-made materials for superior stability. Specifications are subject to change without notice when such changes do not alter product performance. Slight color variation may occur from dye lot to dye lot.

### WARRANTIES

<b>Wear</b>	Lifetime of Carpet. No more than 10% face yarn loss by weight in normal use.
<b>Static</b>	Lifetime of Carpet.
<b>Edge Ravel</b>	Lifetime of Carpet. Guaranteed no edge ravel in normal use (no seam sealers required).
<b>Delamination</b>	Lifetime of Carpet. Guaranteed no delamination in normal use (no chair pads required).
<b>Tuft Bind</b>	Lifetime of Carpet. Guaranteed not to zipper, wet or dry.

